

Comparison of a Stratified and a Single-Layer Laboratory Sand Filter to Treat Dairy Soiled Water from a Farm-Scale Woodchip Filter

Eimear M. Ruane · Paul N. C. Murphy ·
Padraig French · Mark G. Healy

Received: 16 October 2013 / Accepted: 20 February 2014 / Published online: 11 April 2014
© Springer International Publishing Switzerland 2014

Abstract Washing-down parlours and standing areas, following milking on dairy farms, produce dairy soiled water (DSW) that contains variable concentrations of nutrients. Aerobic woodchip filters can remove organic matter, nutrients and suspended solids (SS) in DSW, but the effluent exiting the filters may have to be further treated before it is suitable for re-use for washing yard areas. The performance of a single-layer sand filter (SF) and a stratified SF, loaded at $20 \text{ L m}^{-2} \text{ day}^{-1}$, to polish effluent from a woodchip filter was investigated over 82 days. Average influent unfiltered chemical oxygen demand (COD_T), total nitrogen (TN), ammonium-N ($\text{NH}_4\text{-N}$), ortho-phosphorus ($\text{PO}_4\text{-P}$) and SS concentrations of $1,991 \pm 296$, 163 ± 40 , 42.3 ± 16.9 , 27.2 ± 6.9 and $84 \pm 30 \text{ mg L}^{-1}$ were recorded. The single-layer SF decreased the influent concentration of COD_T , TN, $\text{NH}_4\text{-N}$, $\text{PO}_4\text{-P}$ and SS by 39, 36, 34, 58 and 52 %, respectively. Influent concentrations of COD_T , TN, $\text{NH}_4\text{-N}$, $\text{PO}_4\text{-P}$ and SS were decreased by 56, 57, 41, 74 and 62 % in the stratified SF. The single-layer SF and

the stratified SF were capable of reducing the influent concentration of total coliforms by 96 and 95 %, respectively. Although a limited amount of biomass accumulated in the uppermost layers of both SFs, organic and particulate matter deposition within both filters affected rates of nitrification. Both types of SFs produced final water quality in excess of the standards for re-use in the washing of milking parlours.

Keywords Dairy soiled water · Intermittent filtration · Sand · Treatment

1 Introduction

Dairy soiled water (DSW) is water from concreted areas, hard stand areas, and holding areas for livestock that has become contaminated by livestock faeces or urine, chemical fertilisers and parlour washings (SI no. 610 of 2010), and contains high and variable levels of nutrients such as nitrogen (N) and phosphorus (P), as well as other constituents such as spilt milk and cleaning agents. It is legally defined in Ireland as having a 5-day biochemical oxygen demand (BOD_5) of less than $2,500 \text{ mg L}^{-1}$ and less than 1 % dry matter (DM) content (SI no. 610 of 2010). Application of DSW to the land has long been the most common method of disposal employed by farmers (Martínez-Suller et al. 2010). However, when DSW is land applied at rates that exceed the nutrient requirements of the pasture, it can create a number of problems, including the threat of loss of P and N in runoff and, depending on the soil type,

E. M. Ruane · M. G. Healy
Civil Engineering, National University of Ireland,
Galway, Ireland

E. M. Ruane (✉) · P. N. C. Murphy · P. French
Livestock Systems Research Department, Animal and
Grassland Research and Innovation Centre,
Teagasc, Moorepark, Fermoy, Co. Cork, Ireland
e-mail: eimear.ruane@teagasc.ie

P. N. C. Murphy
Agricultural Catchments Programme,
Teagasc, Johnstown Castle, Co. Wexford, Ireland

subsurface leaching of P and N (Knudsen et al. 2006; Regan et al. 2010). Therefore, treatment of DSW and re-use of filtered water may be considered as a management option to divert DSW from land application.

Aerobic woodchip filters can decrease concentrations of organic matter, nutrients and suspended solids (SS) in DSW (Ruane et al. 2011a), but their effluent may still contain nitrate (NO_3) and coliforms (Ruane et al. 2011b), which means that it cannot be re-used as wash water for parlours (EC 1980; IMQCS and Teagasc 2004). Therefore, before the use of aerobic woodchip filters can be recommended for on-farm treatment of DSW, further treatment is needed. Intermittent sand filters (SFs) may be used as a form of tertiary treatment for this wastewater. After passing through a woodchip filter followed by further treatment in a SF, it is proposed that the effluent could then be used to wash down a holding yard or milking parlour, depending on the level of treatment achieved. This paper investigates the efficacy of two design configurations of SFs—single layer and stratified.

Single-pass intermittent SFs (intermittently loaded SFs operated without recirculation of a portion of the final effluent) have been employed as a tertiary treatment system to polish several types of wastewaters (Leverenz et al. 2009; Healy et al. 2010). Their ability to reduce the concentration of various water quality parameters, including N and P, is well documented (Nakhla and Farooq 2003; Healy et al. 2006). Stratified SFs, containing sand media organised into layers of varying particle size, are also commonly used to treat wastewater (Nichols et al. 1997; Rodgers et al. 2005), due to the perception that the performance may be enhanced. Both types of SFs are also noted for their ability to reduce the concentration of pathogenic bacteria and micro-organisms (Bahgat et al. 1999; Stevik et al. 2004). However, operational problems still exist. These are primarily associated with clogging within the matrix of the sand, due to accumulation of particulate matter and micro-organisms on surfaces as biofilms, and the finite ability of the SF to remove P (Campos et al. 2002; Rodgers et al. 2005). As the presence of biofilm ultimately determines the longevity of a SF and is related to organic loading rate (OLR) and the size of the filter media (Rodgers et al. 2004), as well as hydraulic loading rate (HLR), filter dosing frequency and time of operation (Leverenz et al. 2009), it is important to monitor biofilm development in tandem with treatment efficacy when operating SFs. The deconstruction of SFs at

the end of an experimental trial period allows a unique opportunity to assess the extent of biofilm development.

No study has compared the efficiency of stratified and single-layer SFs in treating DSW under the same organic and HLRs. In addition, although the build-up of biofilm on specific types of SFs has been well documented (sand, Rodgers et al. 2004; crushed glass and soil, Healy et al. 2011), no study has evaluated the difference between both filters vis-à-vis biofilm development. The build-up of biofilm, combined with an evaluation of their relative performance, may be used to determine the practicability of one design over another.

Physical and chemical mechanisms responsible for clogging, such as the field-saturated hydraulic conductivity (K_{fs}) and the organic matter content of the media, may be used to quantify the extent of biofilm build-up within a filter. In an intermittent SF, loaded with synthetic wastewater resembling DSW and operated for a period of 806 days, Rodgers et al. (2004) quantified the extent of biofilm build-up by dismantling the filter and measuring the K_{fs} in 0.02-m-depth increments from the surface of the filter. The reduction of K_{fs} appeared to extend deep into the SF and only returned to a K_{fs} of virgin sand (packed to the same density as in the SF) at a depth of 0.165 m below the filter surface. Rodgers et al. (2004) also used loss on ignition (LOI; BS 1377-3 1990) to give an indication of biomass distribution within the SF and found similar trends to the K_{fs} measurements.

As the use of a SF is proposed as a final step in the overall treatment of DSW, the aim of this study was to compare the efficacy of two common types of SFs, stratified and single layer, for their ability to polish effluent from farm-scale woodchip filters. The purpose of investigating two alternative SF designs was to propose a final tertiary treatment step as part of an overall on-farm system for the treatment of DSW, which would incorporate woodchip filters and, potentially, SFs.

2 Materials and Methods

Two types of SFs were compared at laboratory-scale: (1) stratified SFs and (2) single-layer SFs (Fig. 1). There were three replicates of each filter type. Filters were 0.3 m in diameter, stratified SFs were 1 m deep and single-layer SFs were 0.9 m deep. The stratified SF consisted of a 0.25-m-deep layer of distribution stone (6–10 mm diameter), underlain by a 0.2-m-deep layer of

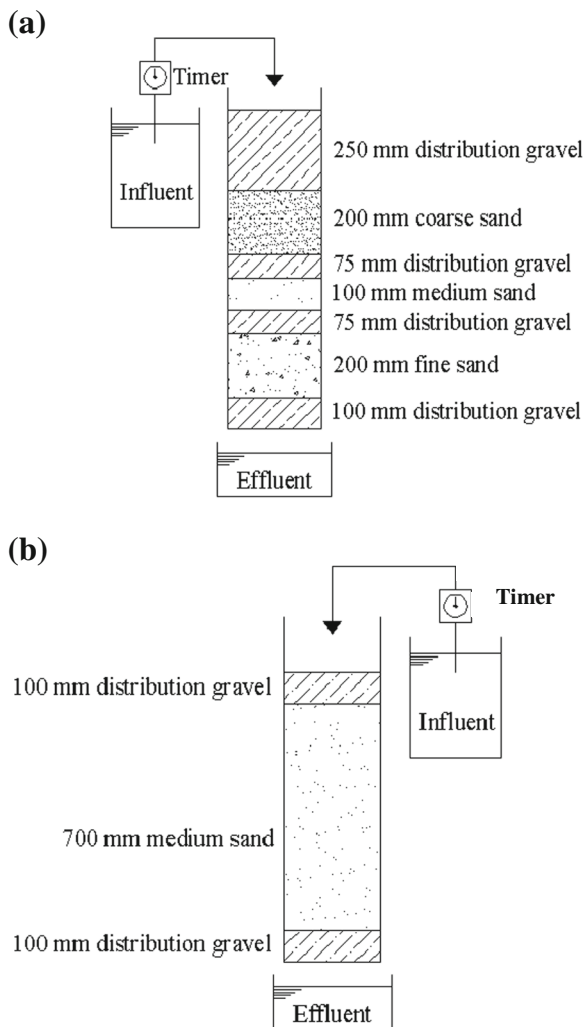


Fig. 1 Schematic design of a stratified SF (a) and a single-layer SF (b)

coarse sand (effective size, D_{10} , 0.5–1.0 mm), a 0.075-m-deep layer of distribution stone, a 0.1-m-deep layer of medium sand (D_{10} , 0.4–0.8 mm), a 0.075-m-deep layer of distribution stone and a 0.2-m-deep layer of fine sand (D_{10} , 0.2–0.63 mm). The bottom layer of sand was underlain by a 0.1-m-deep layer of distribution stone. The sand depth and classification specifications were based on a study by Gross and Mitchell (1985), who obtained good removal efficiency with this design. The stratified SF consisted of a 0.1-m-deep distribution layer (6–10 mm in size) underlain by a 0.7-m-deep layer of fine sand (D_{10} , 0.2–0.63 mm) and a 0.1-m-deep layer of washed stone (6–10 mm in size). The design specifications used for the single-layer SF are based on recommendations made in previous studies and by the US

EPA, which state that a single-pass, single-layer SF should have a depth of 0.61–0.91 m and a D_{10} of 0.33 mm (US EPA, 1980; Ball and Denn 1997; Loomis and Dow 1999). Double-leaf CorriPipe™ (a locally sourced, commercially available pipe; JFC Ltd., Tuam, Co. Galway), 0.3 m in diameter (after Rodgers et al. 2005), was used to contain the sand. A steel mesh was attached to the base of the filters to hold the sand columns in place, and a plastic container was placed under the base of each SF to collect the treated effluent.

Each single-layer SF was instrumented with an access tube (type ATL1, Delta-T Devices Ltd., Cambridge, UK) to allow volumetric water content to be measured at various depths. A capacitance probe (type PR1/6d-02, Delta-T Devices Ltd., Cambridge, UK) was inserted into the access tube and readings taken using a voltmeter (type HR2 Delta-T Devices Ltd., Cambridge, UK). Readings were taken at 0.3, 0.4 and 0.6 m depth. These readings were then converted into volumetric water content ($\text{m}^3 \text{m}^{-3}$) using the manufacturer's calibration curve.

Effluent from a farm-scale woodchip filter treating fresh DSW (Ruane et al. 2011b) was collected every 3 days, stored in a tank and loaded onto the SFs at a HLR of $20 \text{ L m}^{-2} \text{ day}^{-1}$. The HLR was based on the average effluent chemical oxygen demand (COD) concentration from the farm-scale woodchip filters (Ruane et al. 2011b) and was chosen so as the OLR on the SFs would not exceed approximately $25 \text{ g COD m}^{-2} \text{ day}^{-1}$ —the OLR above which SFs cease to be effective (Rodgers et al. 2005). Effluent from the woodchip filters was pumped onto the surface of all six SFs every 2 h using a peristaltic pump (Masterflex L/S 16, Illinois, USA) delivering 118 mL/dose via a spiral distribution manifold, positioned on the surface of each SF. The total study duration was 82 days.

A 50-mL sample was collected from the influent for the SFs (discharge effluent from the woodchip filter) and from the effluent at the base of each SF for analysis twice weekly. After collection of the 50-mL sample the buckets beneath each SF were emptied and cleaned. Therefore, the 50-mL sample is a subsample of the effluent collected during a three or 4-day period. Samples were frozen immediately and tested within a period of 14 days. A closed reflux method was used to test for unfiltered COD (COD_T) and filtered COD (COD_F). Total N and filtered TN (TN_F) were measured using the persulfate method. SS were measured by filtering a 10-mL sample through a filter paper ($1.4 \mu\text{m}$) and

drying the solids captured and the filter paper for 24 h at 103–105 °C. Filtered samples were measured for ammonium–N (NH₄–N), nitrite–N (NO₂–N), total oxidised N (TON) and ortho-phosphorus (PO₄–P) using a Konelab 20 nutrient analyser (Fisher Scientific, Waltham, Massachusetts). Nitrate–N was calculated by subtracting NO₂–N from TON. Dissolved organic N (DON) was calculated by subtracting NO₂–N, NO₃–N and NH₄–N from TN_F. Particulate N (PN) was calculated by subtracting TN_F from TN. Inorganic N comprised NH₄–N, NO₂–N and NO₃–N. TON was calculated by subtracting inorganic N from TN. Samples of influent and effluent from all six SFs, taken on days 62 and 75, were also analysed for total coliform (TC) content. All tests were carried out in accordance with the standard methods (APHA-AWWA-WEF 1995).

Removal of nutrients and other water quality parameters was calculated as the influent concentration minus the effluent concentration, expressed as a percent of the influent concentration. Descriptive statistics were used to characterise influent and effluent concentrations and removal rates. Percent removal data were analysed using ANOVA (SAS Institute 2004) in a one-factorial design to test the effect of filter type on performance.

2.1 Phosphorus Adsorption Isotherms

A P adsorption isotherm test was carried out on the three sands used in the SFs. A sample of each sand ($n=3$) was first washed in distilled water diluted with 10 % hydrochloric acid to eliminate interference from the native P content of the sand. Solutions containing four known concentrations of PO₄–P (21.5, 46.1, 61.4 and 92.1 mg PO₄–P L⁻¹) were used. Approximately 15 g of each type of sand—fine, medium and coarse—was added to separate containers and mixed with 115 mL of each solution concentration. Each mixture was then shaken for 24 h using an end-over-end mixer. The solids were separated from the mixture using a centrifuge, and the supernatant water was tested for PO₄–P. The data obtained was then modelled using a Langmuir adsorption isotherm (McBride 2000):

$$\frac{x}{m} = q_{\text{MAX}} \left(\frac{k_A C_e}{1 + k_A C_e} \right) \quad (1)$$

where x/m is the quantity of P adsorbed per gramme of sand, C_e is the equilibrium P concentration in the pore water (g m⁻³) at the end of the test, k_A (m³ g⁻¹) is the

measure of the affinity of the P for the sand and q_{MAX} (g P g⁻¹ sand) is the maximum amount of P that can be adsorbed onto the sand.

2.2 Assessing Biomass Build-up

After 82 days of operation, two columns from each set of SFs were destructively sampled so that the build-up of biomass within each filter could be quantified using LOI (BS 1377-3 1990; BS 1377-5 1990). For determination of the mass LOI, replicated sand samples ($n=3$) were taken from four layers below the surface distribution gravel: 0–0.03, 0.03–0.06, 0.06–0.09 and 0.09–0.12 m. Samples were dried at 50 °C until a constant weight was achieved, then ground down until they passed through a 425- μm sieve. The prepared samples were placed in a cool muffle furnace and then heated to 450 °C for over 3 h. The LOI from the dismantled SFs were then compared with virgin sand samples.

Physical changes in the single-layer SFs were also investigated by measuring the K_{fs} (m s⁻¹) (constant-head method; BS 1377-3 1990) of samples taken at the same depth increments as the LOI samples. To measure K_{fs} , an open-ended circular container, 0.05 m in diameter, was used to extract a sand core of height, l (30 mm in height). Three replicate samples were taken from two single-layer SFs. Water was supplied to the container and an overflow pipe maintained a constant head in the container, z (20 mm). Once constant flow rates were maintained, the flow rate, Q , was measured by calculating the time taken for a known volume of water to be collected. Taking the base of the open-ended cell as datum, the hydraulic gradient was defined as:

$$\frac{dH}{dZ} = 1 + \frac{z}{l} \quad (2)$$

The K_{fs} was then calculated using Darcy's Law (Craig 1997):

$$\frac{Q}{A} = K_{fs} \frac{dH}{dZ} \quad (3)$$

where A is the cross-sectional area of the open-ended cell.

3 Results and Discussion

3.1 Organic Carbon (COD) and SS Removal

The influent COD concentration in this study was higher than most other studies using SFs to treat wastewater that had undergone at least primary treatment (Table 1). Influent concentrations of COD_T were, on average, 1,991±296 mg L⁻¹. The single-layer SF decreased the influent concentration by 39 % to 1,204±270 mg L⁻¹ (Table 2). The performance of the stratified SF was significantly better ($P<0.001$), achieving an average decrease of 56 %, resulting in an effluent concentration of 871±121 mg L⁻¹. A study by Rodgers et al. (2005) found that, after 230 days, a stratified SF treating synthetic DSW at the same HLR achieved a removal rate of 96 %, decreasing an influent concentration of 1,340±285 to 60±125 mg L⁻¹. However, the better performance achieved by Rodgers et al. (2005) may be a result of the enhanced straining effects of the medium due to the higher deposition of organic materials, sediment and bacteria on the SF surface over a longer operational period (230 versus 82 days in the present study).

An average influent COD_F concentration of 1,073±221 mg L⁻¹ was measured and removal rates of 38 and 55 % were achieved by the single-layer and the stratified SF, respectively. The removal rates achieved by the stratified SF were significantly better ($P<0.001$) for both COD_T and COD_F. This would indicate that the stratified SFs were better at decreasing the soluble fraction of the influent as well as the fraction associated with

influent SS. Therefore, both physical filtration and the oxidation of organic compounds may have contributed to the decrease in concentrations of COD_T and COD_F.

Influent SS concentrations were, on average, 84±30 mg L⁻¹ (Table 2). The single-layer SF achieved an average decrease of 52 %, giving an effluent concentration of 41±8 mg L⁻¹. Effluent concentrations of 32±6 mg L⁻¹ were achieved by the stratified SF; a decrease of 62 % on the influent concentration. Removal rates for the stratified SF were significantly better than the single-layer SF ($P<0.001$). Straining is the main mechanism of removing SS in SFs with interception, impaction and adhesion also contributing to the overall reduction of solids in the effluent (Prochaska and Zouboulis 2003).

3.2 Nitrogen Removal and Conversion

Influent concentrations of TN ranged from 124 to 250 mg L⁻¹ with a mean of 163 mg L⁻¹. The single-layer SF decreased the influent by, on average, 36 % to 104±18 mg L⁻¹ and the stratified SF by 57 % to 70±21 mg L⁻¹ ($P<0.001$) (Table 2). The influent TN_F concentration of 113±25 mg L⁻¹ was decreased by an average of 38 % for the single-layer SF to 61±21 mg L⁻¹ and by 41 % for the stratified SF to 59±21 mg L⁻¹ ($P>0.05$) (Table 2). Influent PN was, on average, 57±45 mg L⁻¹. The stratified SF outperformed the single-layer SF, decreasing the influent concentration by 80 % compared with 25 % for the single-layer SF (Table 2). Given its direct association with the SS concentration, it is most likely that the PN was reduced primarily by filtration and straining.

Table 1 Average chemical characteristics (mg L⁻¹) of effluent from the woodchip filter used in this study over a period eleven months ($n=78$) compared with influent characteristic of other SF studies

Reference	Influent type	HLR (L m ⁻² day ⁻¹)	NO ₃ -N (mg L ⁻¹)	NH ₄ -N	TN	PO ₄ -P	SS	COD
The present study	DSW after woodchip filter	20	25.9	42.3	163	27.27	84	1,991
Gill et al. (2009)	Septic tank effluent ^a	28	0.8	16.2	20.7	3.14		492.6
Nakhala and Farooq (2003)	Secondary municipal effluent	0.15–0.38 ^b	0.4		3.2	0.6	14	41
Rodgers et al. (2004)	Aerobic biofilm treatment effluent	75	126.1	39.5		36.9	106	127.5
Rodgers et al. (2005)	Synthetic DSW	20	2	50	120	30	265	1,340
Rolland et al. (2009)	Synthetic septic tank effluent	30 ^d		56.4		8.9	86	462
Torrens et al. (2009)	FWSP effluent	0.15–80 ^c	0.5	12		2.4	44	140

^a Concentrations given in grammes per day

^b In metres per hour

^c In metres per day

^d In centimetres per square metre per day

Table 2 Average chemical characteristics of influent and effluent from three single-layer and three stratified sand filters

	Influent (mg L ⁻¹)		Effluent					
			Single layer			Stratified		
			mg L ⁻¹		Decrease (%)	mg L ⁻¹		Decrease (%)
Total COD (COD _T) ^a	1,991	(296)	1,204	(270)	39	871	(121)	56
Filtered COD (COD _F) ^a	1,073	(221)	661	(162)	38	480	(51)	55
Total N (TN) ^a	163	(40)	104	(18)	36	70	(21)	57
Total organic N	89	(42)	54	(15)	39	22	(19)	76
Inorganic N	74	(22)	48	(8)	35	43	(9)	42
Particulate N	57	(45)	43	(16)	25	12	(9)	80
Filtered TN (TN _F)	113	(25)	61	(21)	38	59	(21)	41
Dissolved organic N (DON)	39	(25)	13	(16)	65	15	(18)	61
NH ₄ -N	42.3	(16.9)	23.5	(6.8)	34	20.7	(3.9)	41
NO ₂ -N	6.2	(5.1)	4.2	(2.1)	33	3.1	(1.7)	50
NO ₃ -N ^a	25.9	(8.2)	18.9	(7.4)	27	24.9	(8.0)	4
Mineral N	32	(9)	24	(7)	24	19	(7)	40
PO ₄ -P ^a	27.27	(6.91)	11.41	(7.34)	58	7.08	(3.15)	74
SS ^a	84	(30)	41	(8)	52	32	(6)	62
	CFU 100 mL ⁻¹		CFU 100 mL ⁻¹			CFU 100 mL ⁻¹		
Total coliforms	8.5 × 10 ⁶	7.1 × 10 ⁵	3.2 × 10 ⁵	1.6 × 10 ⁵	96	4.2 × 10 ⁵	13.2 × 10 ⁵	95

Standard deviations are shown in brackets

^aDecrease in effluent is significantly different between filter type

At 89±42 mg L⁻¹, TON (dissolved and particulate) accounted for, on average, 54 % of the influent TN concentration. The single-layer SF decreased the influent concentration by an average of 39 %, producing an effluent with a TON concentration of 54±15 mg L⁻¹. The stratified SF produced an effluent concentration of 22±19 mg L⁻¹, an average decrease of 76 % (Table 2). The principal mechanisms of removing and transforming influent concentrations of TON in these aerobic SFs are likely to be filtration and mineralisation. As with SS, physical straining of particulate organic N as the influent water interacts with the porous media is likely the main mechanism of removing SS in SFs.

Dissolved organic N in the influent was, on average, 39±25 mg L⁻¹ over the duration of the study. The single-layer SF achieved a decrease of 65 % to produce an effluent concentration of 13±16 mg L⁻¹. The stratified SF produced an effluent concentration of 15±18 mg L⁻¹, which represented an overall decrease of 61 %. Mineralisation of DON was likely the main transformation mechanism for decreasing the influent concentration of DON. Oxygen is transported into the

filter with the intermittently applied influent water and by diffusion in porous and unsaturated media (Schwager and Boller 1997). As DON decreases were likely due to mineralisation, it might have been expected that NH₄-N concentrations might increase in the effluent. However, the influent NH₄-N concentration decreased from 42±17 to 24±7 mg L⁻¹ in the single-layer SF and to 21±4 mg L⁻¹ in the stratified SF, representing a decrease of 34 and 41 %, respectively ($P>0.05$) (Table 2). Influent inorganic N concentration was, on average, 74±22 mg L⁻¹ over the duration of the study. Of this, NH₄-N accounted for the largest fraction at 57 %. As the SFs were aerobic, the principal mechanism for the decrease in NH₄-N, despite the presumed production of additional NH₄-N via mineralisation, was nitrification. Sorption of NH₄⁺ was possible but, as the clay content of the filter sands was negligible, this was very unlikely.

As NH₄-N decreases were likely due to nitrification, it might have been expected that NO₂-N and NO₃-N concentrations might increase in the effluent. However, the single-layer SF decreased NO₂-N and NO₃-N by 33 and 27 % and the stratified SF by 50 and 4 %, respectively.

respectively ($P>0.05$). During the first 40 days, there was an increase in $\text{NO}_3\text{-N}$ and a decrease in $\text{NH}_4\text{-N}$ that would indicate that nitrification was occurring (Fig. 2). After 40 days, effluent concentrations of $\text{NH}_4\text{-N}$ and $\text{NO}_3\text{-N}$ reach an equilibrium suggesting that biofilm may have established itself and $\text{NO}_3\text{-N}$ may have been taken up into biomass in biofilms growing on the filter medium (Bouwer et al. 2000). A more likely scenario would be due to the retention of PN and TON within both sets of filters: mineralisation of organic N would have affected $\text{NH}_4\text{-N}$ removals, which, in turn, may have affected nitrification rates. The high retention of PN and TON in the stratified SF (80 and 76 %, respectively) would appear to be related to the $\text{NO}_3\text{-N}$ removal rate of 4 %. This was much lower than the single-layer SF (27 %), which had comparatively low removals of PN and TON (25 and 39 %, respectively). This, combined with the high OLR applied to the filters (approximately $40 \text{ g COD}_T\text{m}^{-2} \text{ day}^{-1}$), may have suppressed nitrification activity. US EPA guidelines (US EPA 1980) recommend a maximum COD_T loading rate of approximately $10 \text{ g COD}_T\text{m}^{-2} \text{ day}^{-1}$. Operating within this

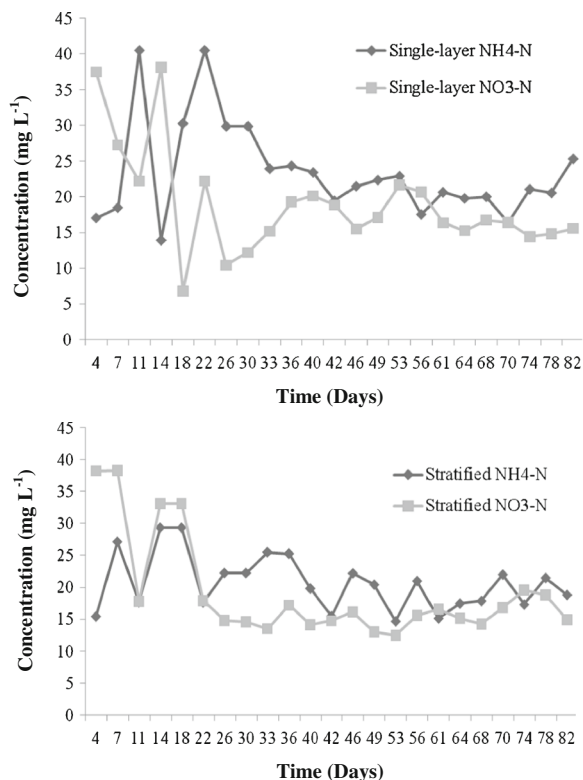


Fig. 2 Comparison of the concentration of $\text{NH}_4\text{-N}$ and $\text{NO}_3\text{-N}$ in the effluent from the single-layer SF (top) and stratified SF (bottom)

OLR, other studies achieved almost complete nitrification (Nichols et al. 1997; Rodgers et al. 2005).

3.3 Phosphorus Retention

The influent concentration of $\text{PO}_4\text{-P}$ was, on average, $27.3 \pm 6.9 \text{ mg L}^{-1}$ (Table 2). The single-layer SF decreased the influent concentration by 58 % to an average effluent concentration of $11.4 \pm 7.3 \text{ mg L}^{-1}$. The stratified SF achieved an average decrease of 74 %, producing an average effluent concentration of $7.1 \pm 3.2 \text{ mg L}^{-1}$ ($P<0.05$). For the single-layer SF, which consisted solely of medium sand (D_{10} , 0.4–0.8 mm), using the Langmuir isotherm, the theoretical maximum mass of P adsorbed per mass of sand was calculated to be 379 mg P kg^{-1} sand. The maximum mass of P adsorbed per mass of sand was calculated as $759.2 \text{ mg P kg}^{-1}$ for the fine sand (D_{10} , 0.2–0.63 mm) and $1,452.3 \text{ mg P kg}^{-1}$ for the coarse sand (D_{10} , 0.5–1 mm). The high adsorbancy of the coarse sand may have been related to its mineralogy (not tested). These results are consistent with other studies showing a strong link between P sorption capacity of a filter medium and P removal. Healy et al. (2010) used three media (crushed glass, 0.5 to 1.1 mm in size; sand, D_{10} , 0.15 mm; and a shallow podzolized soil sieved to less than 5 mm) in 0.65-m-deep filters to treat low-strength domestic wastewater. The respective P adsorption capacities of the filter media (measured using a Langmuir adsorption isotherm) were: 10.3, 85 and $1043 \text{ mg P kg}^{-1}$ and decreases of $\text{PO}_4\text{-P}$ of 2.4, 4.3 and 100 % were achieved in the glass, sand and soil filters.

3.4 Microbial Analysis

Influent TC values of $8.5 \times 10^6 \pm 7.1 \times 10^5 \text{ CFU } 100 \text{ mL}^{-1}$ were measured on days 62 and 75 of operation. Both the single-layer SFs and the stratified SFs recorded similar very high rates of removal of 96 and 95 %, reducing the concentration of TC to $3.2 \times 10^5 \pm 1.6 \times 10^5 \text{ CFU } 100 \text{ mL}^{-1}$ and $4.2 \times 10^5 \pm 13.2 \times 10^5 \text{ CFU } 100 \text{ mL}^{-1}$, respectively. Physical filtration and adsorption, or adhesion, are believed to be the principal mechanisms for removing pathogenic bacteria from wastewater in a SF (Stevik et al. 2004). However, the water supply for cleaning operations in the milking parlour must be of potable standard (IMQCS and Teagasc 2004) and for a treated wastewater to reach a standard of potable water, no coliforms may be present (EC 1980). Therefore, some form of disinfection would

be required to bring the treated effluent from the SFs used in this study to the standard of potable water. An UV treatment may be suitable for this purpose.

3.5 Pore-Water Profile and Biomass Build-up

Analysis of the volumetric water content of the single-layer SFs to a depth of 0.6 m indicated there was no significant change with depth or with time from the start of operation (Fig. 3). Rodgers et al. (2005) examined a stratified SF loaded for 342 days with synthetic DSW at a HLR of $20 \text{ L m}^{-2} \text{ day}^{-1}$ and a SS loading rate of between 5.2 and $12 \text{ g SS m}^{-2} \text{ day}^{-1}$ and found that the volumetric water content increased to a maximum value of approximately 40 % at the filter surface. The present study was only operational for 82 days at a SS loading rate of approximately $1.7 \text{ g m}^{-2} \text{ day}^{-1}$. Therefore, the volumetric water contents indicated that significant amounts of biofilm, which could be detected by a capacitance probe, did not build-up in the filter media.

Analysis of the LOI showed that most organic matter resided in the top 0.03 m in the single-layer SF (Fig. 4). The LOI in this layer, at $0.52 \pm 0.02 \%$, was more than five times the LOI of the virgin coarse sand ($0.09 \pm 0.045 \%$). For the stratified SF, LOI was also greatest in the top layer at $0.38 \pm 0.14 \%$ (Fig. 4). Loss on ignition in the 0.03- to 0.06-m layer for the stratified SF was $0.19 \pm 0.04 \%$, compared with $0.3 \pm 0.07 \%$ in the single-layer filter. This could suggest that organic matter build-up extends slightly deeper in the single-layer SF. Rodgers et al. (2004) measured maximum LOI values of

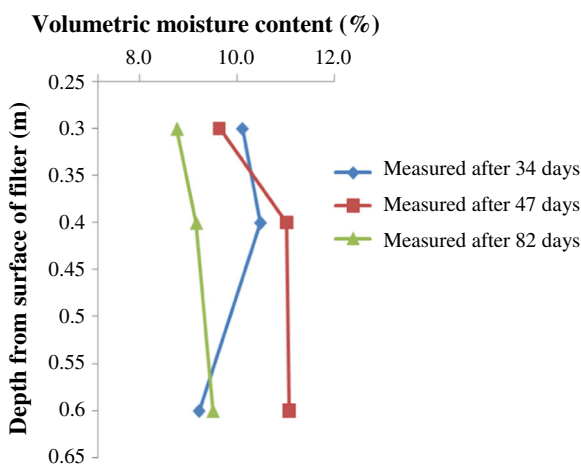


Fig. 3 Volumetric water content measurements in a single-layer SF. Each point is an average of measurements taken on three different occasions (after 34, 47 and 82 days of operation)

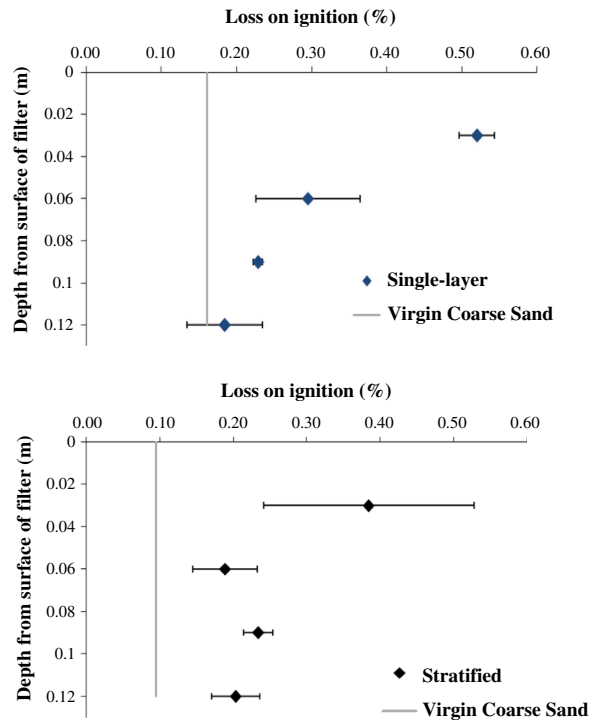


Fig. 4 Mass loss on ignition in the upper layer of medium sand of a laboratory-scale single-layer SF (top) and stratified SF (bottom)

approximately 2.3 % in the uppermost layer (to a depth of 0.02 m below the filter surface) of a stratified SF loaded at OLRs ranging from 6.5 to $76 \text{ g COD}_T \text{ m}^{-2} \text{ day}^{-1}$ over an 806-day period.

Measurements of K_{fs} , carried out on the single-layer SFs (Fig. 5) showed decreases in K_{fs} in upper layers, indicating that some organic matter build-up occurred in the upper layer of the filters. In the 0- to 0.03-m layer, K_{fs} was, on average, $1.34 \times 10^{-4} \pm 4.23 \times 10^{-5} \text{ m s}^{-1}$ and increased to $2.09 \times 10^{-4} \pm 7.05 \times 10^{-5} \text{ m s}^{-1}$ in the 0.03-

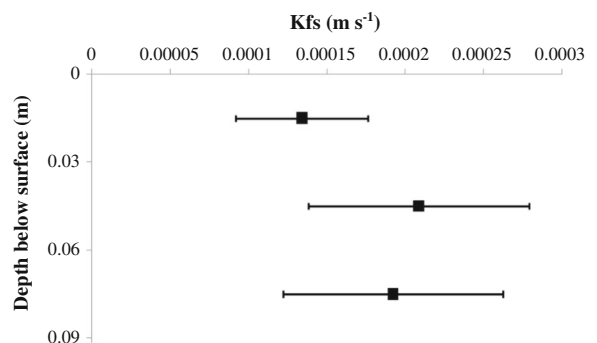


Fig. 5 Field saturated hydraulic conductivity measurements for the single-layer SFs

to 0.06-m layers, and to $2.3 \times 10^{-4} \pm 7.01 \times 10^{-5} \text{ m s}^{-1}$ in the 0.06- to 0.09-m layers. Analysis of the single-layer SFs, on which both LOI and K_{fs} were measured, suggests a correlation between measurements for K_{fs} and the build-up of organic matter to a depth of 0.06 m in the single-layer SFs. The decreasing LOI with depth implies a decrease in the build-up of organic matter on the filter medium with depth. The organic matter build-up may be due to both entrapment of SS from the influent and also the growth of a biofilm on the filter medium. The growth of biofilm in soil and SFs receiving DSW and septic tank effluent has been elucidated by Rodgers et al. (2004) and Nie et al. (2011), amongst others. The growth of such a biofilm would be consistent with uptake by micro-organisms of NO_3 released through mineralisation and nitrification in these aerobic filters.

4 Conclusions

Both types of SFs were capable of decreasing the concentrations of influent water quality parameters. Both filters, however, produced an effluent with an $\text{NO}_3\text{-N}$ concentration greater than the MAC and total coliform limits for re-use in the washing of milking parlours. Analysis of the distribution and build-up of organic matter within the top layers of both SFs indicated that some organic matter build-up had occurred. However, the build-up was only pronounced in the very top layers of both filters. Over time, this build-up might be expected to increase. This might increase filter effectiveness but may also lead, eventually, to problems of filter clogging.

On the basis of this study, stratified SFs are more effective in organic carbon, nutrient and SS removal. The reason for this improved performance is likely the more tortuous flow path and greater retention time that is likely in a SF compared with a single-layer SF. However, issues such as difficulty in construction and the sourcing of sand of an appropriate size hinder their implementation at farm scale. Both filters ultimately do not provide water of a quality suitable for discharge or for the cleaning of milking parlours, and the final effluent may only be used for cleaning of the holding yard or for land spreading.

Acknowledgements The authors are grateful to Teagasc for the award of a Walsh Fellowship to the first author and for financial support provided by the Research Stimulus Fund (Department of

Agriculture, Fisheries and Food). The authors appreciate the technical help of J. Kennelly and D. Minogue (Teagasc).

References

- APHA-AWWA-WEF. (1995). *Standard methods for the examination of water and wastewater* (19th ed.). Washington, USA: American Public Health Association.
- Bahgat, M., Dewedar, A., & Zayed, A. (1999). Sand-filters used for wastewater treatment: buildup and distribution of micro-organisms. *Water Research*, 33, 1949–1955.
- Ball, J. L., & Denn, G. D. (1997) Design of recirculating sand filters using a standardized methodology. In: M.S. Bedinger, A.I. Johnson, and J.S. Fleming (eds). Site characterisation and design of on-site septic systems, ASTM STP 898. American Society for Testing and Materials. West Conshohocken, PA, USA, pp. 191–206.
- Bouwer, E. J., Rijnaarts, H. H. M., Cunningham, A. B., & Gerlach, R. (2000). Biofilms in porous media. In J. D. Bryers (Ed.), *Biofilms II: process analysis and applications* (pp. 123–158). New York: Wiley.
- BS 1377-3 (1990) Part 4. Determination by mass-loss on ignition. British standard method of test for soils for civil engineering purposes. Chemical and electro-chemical tests.
- BS 1377-5 (1990) Part 5. Determination of permeability by the constant-head method. British standard method of test for soils for civil engineering purposes. Compressibility, permeability and durability tests.
- Campos, L. C., Su, M. F. J., Graham, N. J. D., & Smith, S. R. (2002). Biomass development in slow sand filters. *Water Research*, 36, 4543–4551.
- Craig, R.F. (1997) *Soil mechanics*. 6th edition. (485 pp.) E & FN Spon, London.
- EC (1980) Council Directive of 15 July 1980 relating to the quality of water intended for human consumption (80/778/EEC).
- Gill, L. W., O'Suilleabhain, C., Misstear, B. D. R., & Johnston, P. M. (2009). Comparison of stratified sand filters and percolation trenches for on-site wastewater treatment. *Journal of Environmental Engineering*, 135, 8–16.
- Gross, M., & Mitchell, D. (1985) Biological virus removal from household septic tank effluent. *Proceedings of the fourth national symposium on individual and small community sewage systems*. New Orleans, LA. December 10–11, ASAE Publication 07-85, 1985, pp. 295–304.
- Healy, M. G., Rodgers, M., & Mulqueen, J. (2006). Denitrification of a nitrate-rich synthetic wastewater using various wood-based media materials. *Journal of Environmental Science and Health - Part A Toxic/Hazardous Substances and Environmental Engineering*, 41, 779–788.
- Healy, M. G., Burke, P., & Rodgers, M. (2010). The use of laboratory sand, soil and crushed-glass filter columns for polishing domestic-strength synthetic wastewater that has undergone secondary treatment. *Journal of Environmental Science and Health, Part A: Toxic/Hazardous Substances and Environmental Engineering*, 45, 1635–1641.
- Healy, M. G., Rodgers, M., & Burke, P. (2011). Quantification of biofilm build-up in filters when intermittently loaded with

- low-strength synthetic wastewater. *Desalination*, 271(1–3), 105–110.
- IMQCS and Teagasc. (2004). *Recommendations for the installation and testing of milking machines*. Dublin, Ireland: Irish Milk Quality Co-operative Society.
- Knudsen, M. T., Kristensen, I. B. S., Berntsen, J., Petersen, B. M., & Kristensen, E. S. (2006). Estimated N leaching losses for organic and conventional farming in Denmark. *Journal of Agricultural Science*, 144, 135–149.
- Leverenz, H. L., Tchobanoglous, G., & Darby, J. L. (2009). Clogging in intermittently dosed sand filters used for wastewater treatment. *Water Research*, 43, 695–705.
- Loomis, G., & Dow, D. (1999) *Guidelines for the design and use of sand filters in critical resource areas*. Rhode Island Department of Environmental Management, NY, USA.
- Martínez-Suller, L., Provolò, G., Carton, O. T., Brennan, D., Kirwan, L., & Richards, K. G. (2010). The composition of dirty water on dairy farms in Ireland. *Irish Journal of Agricultural and Food Research*, 49, 67–80.
- McBride, M. B. (2000). Chemisorption and precipitation reactions. In M. E. Sumner (Ed.), *Handbook of soil science* (pp. B-265–B-302). Boca Raton: CRC Press.
- Nakhla, G., & Farooq, S. (2003). Simultaneous nitrification–denitrification in slow sand filters. *Journal of Hazardous Materials*, 96, 291–303.
- Nichols, D. J., Wolf, D. C., Gross, M. A., & Rutledge, E. M. (1997). Renovation of septic effluent in a stratified sand filter. *ASTM Special Technical Publication*, 1324, 235–247.
- Nie, J. Y., Zhu, N. W., Zhao, K., & Hu, Y. H. (2011). Analysis of the bacterial community changes in soil for septic tank effluent treatment in response to bio-clogging. *Water Science and Technology*, 63(7), 1412–1417.
- Prochaska, C. A., & Zouboulis, A. I. (2003). Performance of intermittently operated sand filters: a comparable study, treating wastewaters of different origins. *Water, Air, and Soil Pollution*, 147, 367–388.
- Regan, J. T., Rodgers, M., Healy, M. G., Kirwan, L., & Fenton, O. (2010). Determining phosphorus and sediment release rates from five Irish tillage soils. *Journal of Environmental Quality*, 39, 185–192.
- Rodgers, M., Mulqueen, J., & Healy, M. G. (2004). Surface clogging in an intermittent stratified sand filter. *Soil Science Society of America Journal*, 68, 1827–1832.
- Rodgers, M., Healy, M. G., & Mulqueen, J. (2005). Organic carbon removal and nitrification of high strength wastewaters using stratified sand filters. *Water Research*, 39, 3279–3286.
- Rolland, L., Molle, P., Liénard, A., Bouteldja, F., & Grasmick, A. (2009). Influence of the physical and mechanical characteristics of sands on the hydraulic and biological behaviors of sand filters. *Desalination*, 248, 998–1007.
- Ruane, E. M., Murphy, P. N. C., Clifford, E., O'Reilly, E., French, P., & Rodgers, M. (2011a). Performance of a woodchip filter to treat dairy soiled water. *Journal of Environmental Management*, 95(1), 49–55.
- Ruane, E. M., Murphy, P. N. C., Healy, M. G., French, P., & Rodgers, M. (2011b). On-farm treatment of dairy soiled water using aerobic woodchip filters. *Water Research*, 45, 6668–6676.
- SAS Institute (2004) SAS online. Version 9.1. SAS Inst., Cary, NC.
- Schwager, A., & Boller, M. (1997). Transport phenomena in intermittent filters. *Water Science and Technology*, 35(6), 13–20.
- Statutory Instrument No. 610 of 2010. European communities (good agricultural practice for protection of waters) regulations 2010. <http://www.irishstatutebook.ie/2010/en/si/0610.html>. Accessed July 30, 2013.
- Stevik, T. K., Aa, K., Ausland, G., & Hanssen, J. F. (2004). Retention and removal of pathogenic bacteria in wastewater percolating through porous media: a review. *Water Research*, 38, 1355–1367.
- Torrens, A., Molle, P., Boutin, C., & Salgot, M. (2009). Impact of design and operation variables on the performance of vertical-flow constructed wetlands and intermittent sand filters treating pond effluent. *Water Research*, 43, 1851–1858.
- US Environmental Protection Agency (1980). Design Manual: Onsite Wastewater Treatment and Disposal Systems. *EPA Report no. 625/1–80–012*. Cincinnati, OH.